

Specifications

Model Number: W097-4

Interactive Water Effect: Shall be a row of four streams of water adjustable from vertical to 60 degrees.

Housing: Schedule 40 red brass pipe with grounding connection and two 1½" MPT inlets. Supplied with 4, 3/8" x 12" x 2" anchor bolts with two leveling nuts and washers per bolt.

Construction Covers: 2¾" diameter HDPE (high density polyethylene).

Fasteners: Tamper-resistant 18/8 stainless steel.

Nozzles: Four adjustable precision machined brass.


Hydraulic Requirements

□ W097-4

Height	Throw	GPM	psi
2'	2'	8	2
4'	4'	12	3
6'	6'	20	4
8'	8'	28	5

□ *W097C-4 - Water Conserving Version

Height	Throw	GPM	psi
2'	2'	4	2
4'	4'	8	3
6'	6'	12	4
8'	8'	16	5

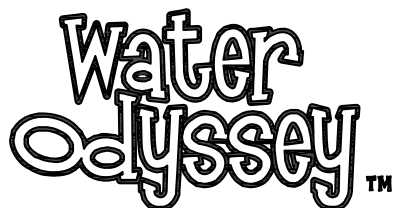

Over N' Under™ -4