

**Specifications**

**Model Number:** F2005  
**Construction:** Hard foam core with Aqua Armor™ (structural elastomeric polymer outer shell).  
**Anchors:** Epoxy Anchors, 1/2"-13, 316 SS. (Supplied).  
**Fasteners:** 1/2"-13 Tamper-resistant 18/8 stainless steel. (Supplied).  
**Space Washers:** As required; must be non-ferrous. (By Installer).  
**Supply Line:** 1.5" with Sch 80 PVC or Brass coupling connection. (By Installer).  
**Hydraulic Requirements:** 32 GPM (121 LPM) at 5 psi (.34 bar).


**Optional Activators**

- Flow FluxUator (Add "-FF" to Model Number)
- Wireless Activator (Add "-SW" to Model Number)

**International Optional Adders**

- Metric Thread (Add "-MET" to Model Number)
- British Standard Pipe (Add "-BSP" to Model Number)

**Note:**  
 Refer to "Installation Detail" for additional installation procedure.

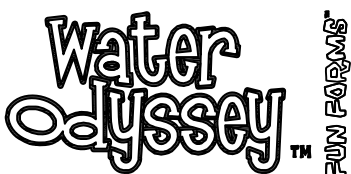

# Pirate Prow Aqua Sprayer

## Specifications