

Specifications

Model Number: F2009
Construction: Hard foam core with Aqua Armor™ (structural elastomeric polymer outer shell).
Anchors: Epoxy Anchors, 1/2"-13, 316 SS. (Supplied).
Fasteners: 1/2"-13 Tamper-resistant 18/8 stainless steel. (Supplied).
Space Washers: As required; must be non-ferrous. (By Installer).
Supply Line: 1.5" with Sch 80 PVC or Brass coupling connection. (By Installer).
Hydraulic Requirements: 37 GPM (140 LPM) at 15 psi (1.03 bar).


Optional Activators

- Flow FluxUator (Add "-FF" to Model Number)
- Wireless Activator (Add "-SW" to Model Number)

International Optional Adders

- Metric Thread (Add "-MET" to Model Number)
- British Standard Pipe (Add "-BSP" to Model Number)

Note:
 Refer to "Installation Detail" for additional installation procedure.

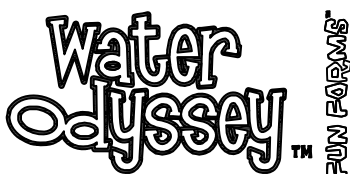

Wally Whale Tail Aqua Sprayer

Specifications