

Specifications

Model Number: F2044

Construction: Hard foam core with Aqua Armor™ (structural elastomeric polymer outer shell).

Anchors: Epoxy Anchors, 1/2"-13, 316 SS. (Supplied).

Fasteners: 1/2"-13 Tamper-resistant 18/8 stainless steel. (Supplied).

Space Washers: As required; must be non-ferrous. (By Installer).

Supply Line: 1.5" with Sch 80 PVC or Brass coupling connection. (By Installer).

Hydraulic Requirements: 10 GPM (38 LPM) at 3 psi (.21 bar).

Optional Activators


- ☐ Wireless Activator (Add "-SW" to Model Number)

International Optional Adders

- ☐ Metric Thread (Add "-MET" to Model Number)
- ☐ British Standard Pipe (Add "-BSP" to Model Number)

Note:

Refer to "Installation Detail" for additional installation procedure.

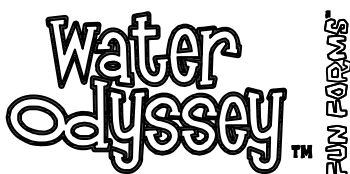

Roger Rattlesnake Aqua Sprayer

Specifications

Fountain People, Inc. - PO Box 807 - 4600 Highway 123 - San Marcos, Texas 78667-0807
Phone (512) 392-1155 - Fax (512) 392-1154 - www.waterodyssey.com

06-30-10
Rev 1

F2044