

Specifications

Model Number: F2066

Construction: Hard foam core with Aqua Armor™ (structural elastomeric polymer outer shell).

Anchors: Epoxy Anchors, 1/2"-13, 316 SS. (Supplied).

Fasteners: 1/2"-13 Tamper-resistant 18/8 stainless steel. (Supplied).

Space Washers: As required; must be non-ferrous. (By Installer).

Supply Line: 1.5" with Sch 80 PVC or Brass coupling connection. (By Installer).

Hydraulic Requirements: 36 GPM (136 LPM) at 6 psi (.41 bar).

Optional Activators


- ☐ Flow FluxUator (Add "-FF" to Model Number)
- ☐ Wireless Activator (Add "-SW" to Model Number)

International Optional Adders

- ☐ Metric Thread (Add "-MET" to Model Number)
- ☐ British Standard Pipe (Add "-BSP" to Model Number)

Note:

Refer to "Installation Detail" for additional installation procedure.

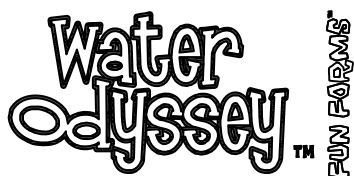

Crow's Nest Aqua Sprayer

Specifications

Fountain People, Inc. ~ PO Box 807 ~ 4600 Highway 123 ~ San Marcos, Texas 78667-0807
Phone (512) 392-1155 ~ Fax (512) 392-1154 ~ www.waterodyssey.com

06-15-10
Rev 1

F2066