

Specifications

Model Number: F3000

Construction: Hard foam core with Aqua Armor™ (structural elastomeric polymer outer shell) and non-slip textured finish.

Anchors: Epoxy Anchors, 1/4"-20, Brass (Supplied).


Fasteners: 1/4"-20 Tamper-resistant 18/8 stainless steel (Supplied).

Space Washers: As required; must be non-ferrous. (By Installer).

Supply Line: 1" with Sch 80 PVC or Brass coupling connection. (By Installer).

Hydraulic Requirements: 8 GPM (30 LPM) at 4 psi (.28 bar).

Note:
Refer to "Installation Detail" for additional installation procedure.

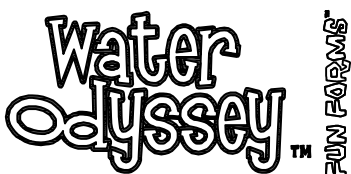

Kirby Crab Aqua Spout

Specifications

Fountain People, Inc. - PO Box 807 - 4600 Highway 123 - San Marcos, Texas 78667-0807
Phone (512) 392-1155 - Fax (512) 392-1154 - www.waterodyssey.com

F3000

06-15-10
Rev 1