

Specifications

Model Number: W294

Interactive Water Effect: A directable spray of water.

Shaft: Straight 2" type 304 stainless steel pipe with a machined type 304 base plate.

Joint: Precision machined Delrin® flow control joint factory adjustable for 45°-360° directional flow.

Body: Type 304 stainless steel manifold housed in a vandal-resistant polymer body.

Anchor Base: Type 304 stainless steel pipe with top plate machined to mate with shaft base plate with grounding connection,, base plate, and 2" FPT inlet. Supplied with four 3/8" x 12" x 2" 18/8 stainless steel anchor bolts with two leveling nuts and washers per bolt, and wood template.

Gasket: 70 durometer EPDM o-ring.



Fasteners: Tamper-resistant 18/8 stainless steel.

Finish: Textured elastomeric urethane with a UV and chlorine resistant sealer coat.


Nozzle: Machined brass foam nozzle.

Options:


- ☐ Integral Wireless Activator. Add Catalog Number Suffix, -SW
- ☐ Water Conserving Cluster Nozzle. Add Catalog Number Suffix, -C

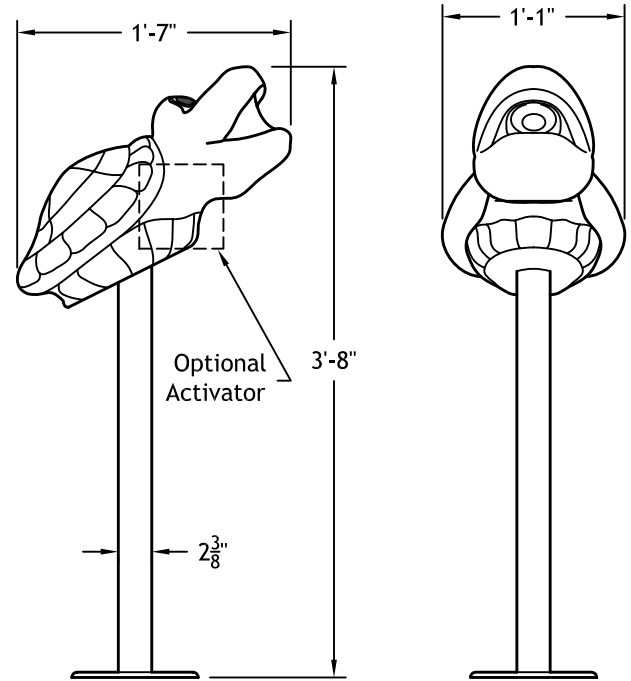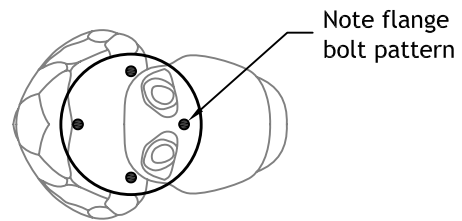

Anchor Base

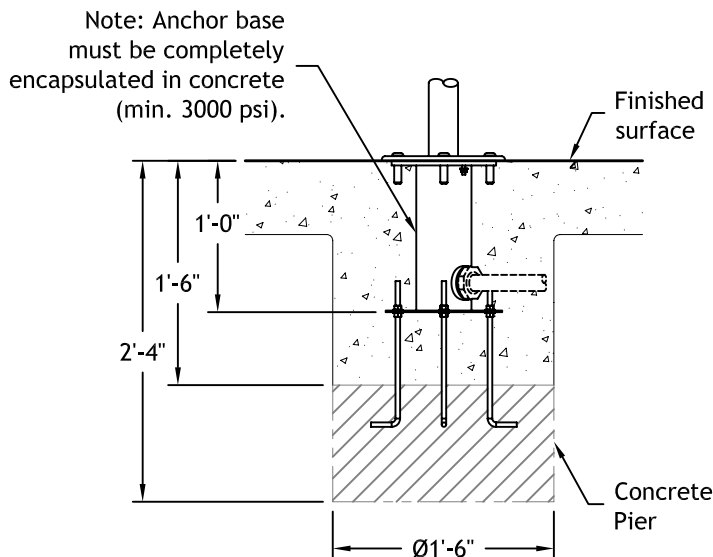

Splash Zone

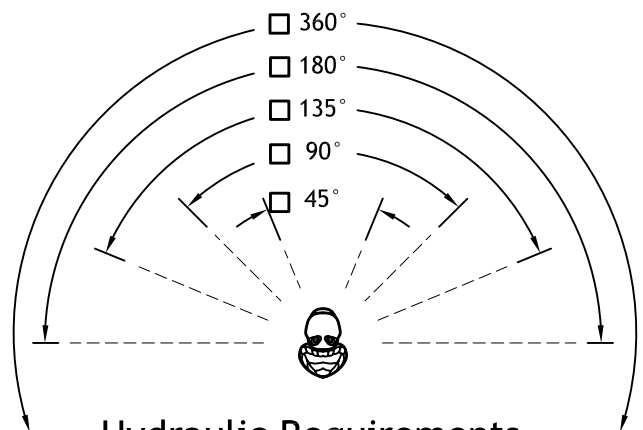

Hydraulic Requirements

☐ W294

Throw	GPM	psi
15'	12	17

☐ *W294C - Water Conserving Version

Throw	*CGPM	*Cpsi
15'	12	17

**Water
Odyssey™**

Little Squerts™ Turtle

W294